




$\frac{3}{4}$ " TWEETER

PMK 19/138RK
1.6209.08

3/4" dome tweeter with textile dome.
The coated diaphragm shows a very high degree of stability against changes in air temperature and humidity.

Consequently this means a stable sound quality.

- Coated textile dome
- Black plastic front plate
- Various applications

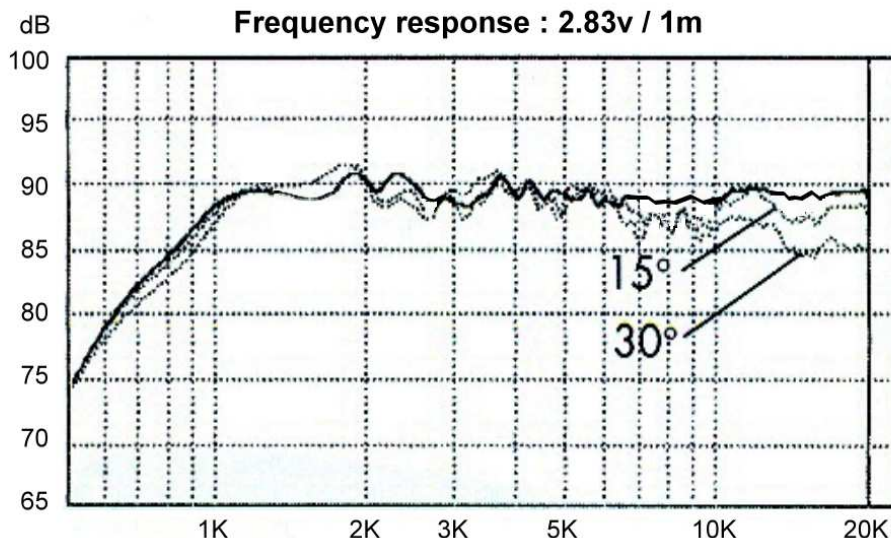

TECHNICAL DATA

Primary Application

Impedance	Z	8	Ohm
DC Resistance	R _{dc}	6,3	Ohm
Resonant Frequency	f _r	1200	Hz
Rated Power	P	80	W

Parameter


Sound Pressure	2.83v/1m	89	dB SPL
Total Moving Mass (including air mass)	M _{ms}	0,16	g
Effective Piston Area	S _D	3,9	cm ²
Mass of Speaker	M	0,3	kg

Voice Coil

Voice Coil Diameter	Ø	19	mm
Voice Coil Former		Aluminium	
Voice Coil Length	h	1,5	mm
Voice Coil Layers	n	2	

Magnet

Flux Density	B	1,4	T
Force factor	B _l	2,3	Tm
Gap Height	h	3	mm
Magnet Diameter	Ø	55	mm
Magnet Height	h	12	mm
Magnet Weight	M	0,115	kg

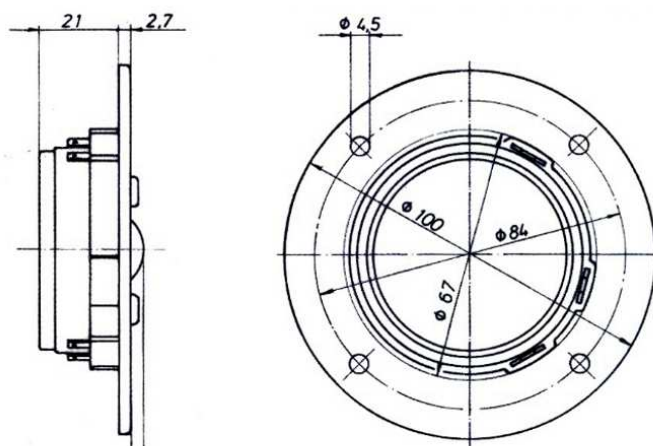

All dimensions in mm